

FEATURES

- Field-Bus remote data acquisition
- Modbus Slave device on RS-485
- Modbus RTU/Modbus ASCII Protocol
- 1 Universal Analogue Input + 1 Analogue Input V/mA
- 2 Analogue Outputs 0-20mA
- 3 Digital Inputs with pulse counters up to 3 kHz
- 1 SSR Digital Output + 2 SPST Relay Outputs
- Watch-Dog Alarm
- Remotely Configurable
- 1500 Vac galvanic isolation on all the ways
- High Accuracy
- UL / CE mark
- DIN rail mounting in compliance with EN-50022



GENERAL DESCRIPTION

The DAT 3011 device is able to acquire RTD or Tc sensors, mV, V or mA input signals connected to the universal analogue input in engineering units in digital format. Moreover it is available a second isolated analogue input for V or mA. The device is able to acquire up to 3 digital inputs and to drive one solid-state relay and two SPST relays. The Data are transmitted with MODBUS RTU/MODBUS ASCII protocol on the RS-485 network.

The device guarantees high accuracy and a stable measure versus time and temperature. To ensure the plant safety two Watch-Dog timer alarms are provided.

The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions.

The DAT 3011 is in compliance with the Directive UL 61010-1 for US market and with the Directive CSA C22.2 No 61010-1 for the Canadian market.

The device is housed in a rough self-extinguishing plastic container which, thanks to its thin profile of 22.5mm only, allows a high density mounting on EN-50022 standard DIN rail.

USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section.

If the module configuration is unknown, with device powered off, connect the INIT terminal to the GND terminal (ground), at the next power on the device will be auto-configured in the default settings (refer to the User Guide of the device).

Connect power supply, serial bus, analogue and digital inputs and outputs as shown in the "Wiring" section.

When the device is powered, the green LED "PWR" is fixed in ON condition, the yellow LED "STS" changes state and depends on the working condition of the device: refer to the "Light Signalling" section to verify the device working state.

To perform configuration and calibration operations, read the instructions in the User Guide of the device.


To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)


INPUT			Input Impedance		POWER SUPPLY	
Input type	Min	Max				
Voltage			mV, TC	10 MΩ	Power supply voltage	18 .. 30 Vdc
100 mV	-100 mV	100 mV	Volt	1 MΩ	Reverse polarity protection	60 Vdc max
10 Volt	-10 V	10 V	mA	22 Ω	Current consumption	100 mA max.
TC			Inputs Thermal Drift (1)	± 0.01% f.s. / °C	ISOLATION	
J	-210°C	1200°C	Thermal Drift CJC	± 0.02 °C / °C	(Power supply - RS485 - Universal input - V	
K	-210°C	1370°C	Sample time	150 ms	mA Input - Digital Inputs - Analogue Outputs)	
R	-50°C	1760°C	Warm-up time	3 minutes	1500 Vac,	
S	-50°C	1760°C	OUTPUT (2 channels)		50 Hz, 1 min	
B	400°C	1825°C	Output type	Min	Max	
E	-210°C	1000°C	Current	0 mA	20 mA	
T	-210°C	400°C	Accuracy (2)	± 0.05 % f.s.		ENVIRONMENTAL CONDITIONS
N	-210°C	1300°C	Linearity (2)	± 0.05 % f.s.		Operative Temperature
			Thermal Drift (2)	± 0.01 % / °C		-10°C .. +60°C
			Load resistance	< 500 Ω		UL Operative Temperature
			Auxiliary Voltage	> 12V @ 20 mA		-10°C .. +40°C
RTD 2,3 wires			Data Transmission			Storage Temperature
Pt100	-200°C	850°C	Baud Rate	115.2 kbps		-40°C.. +85°C
Pt1000	-200°C	200°C	Max. distance	1.2 km – 4000 ft		Humidity (not condensed)
Ni100	-60°C	180°C	DIGITAL INPUTS			0 .. 90 %
Ni1000	-60°C	150°C	Number of Channels	3		Maximum Altitude
			Pulse Counters (32 bit)	3 up to 3 kHz		2000 m
Resistance 2,3 wires			Input voltage	OFF State : 0÷3 V		Installation
Low	0 Ω	500 Ω	(bipolar)	ON State : 10÷30 V		Indoor
High	0 Ω	2000 Ω	Input Impedance	4.7 kΩ		Category of installation
Potentiometer			Frequency Measure	1 Hz (min)÷200 Hz (max)		Pollution Degree
	20 Ω	50 kΩ	DIGITAL OUTPUTS			2
Current			N.1 SSR Output			MECHANICAL SPECIFICATIONS
20 mA	-20 mA	20 mA	Voltage	30 Vac / 48 Vdc		Material
			Current (resistive load)	0.4 A max		Self-extinguish plastic
Accuracy (1)			N.2 Relays SPST			IP Code
mV, Volt, mA	± 0.05 % f.s.		Maximum switching power per contact (resistive load)	2 A @ 250 Vac		Wiring
Pot, RTD, Res.	± 0.05 % f.s.		2 A @ 30 Vdc			wires with diameter
TC	> ± 0.05 % f.s. or 5 uV		Max. voltage	250Vac (50 / 60 Hz) ,		0.8÷2.1 mm ² /AWG 14-18
Linearity (1)				30Vdc		Tightening Torque
mV, Volt, mA	± 0.05 % f.s.					0.5 N m
Pot, RTD, Res.	± 0.1 % f.s.					Mounting
TC	± 0.2 % f.s.					in compliance with DIN
RTD, Res, Pot excitation current						rail standard EN-50022
Typical	0.700 mA					about 150 g.
Lead wire resistance influence						CERTIFICATIONS
RTD/Res 3 wires(50 Ω max balanced)	0.05 f.s. %/Ω					EMC (for industrial environments)
mV, Tc	< 0.8 uV/Ω					Immunity
CJC Compensation error	± 1°C					EN 61000-6-2
(1) Referred to input Span (difference between max. and min. values)						Emission
(2) Referred to output Span (difference between max. and min. values)						EN 61000-6-4
						UL
						US Standard
						UL 61010-1
						Canadian Standard
						CSA C22.2 No
						61010-1
						CCN
						NRAQ/NRAQ7
						Typology
						Open Type device
						Classification
						Industrial Control
						Equipment
						E352854
						File Number

WIRING


ANALOG INPUT 0 - UNIVERSAL

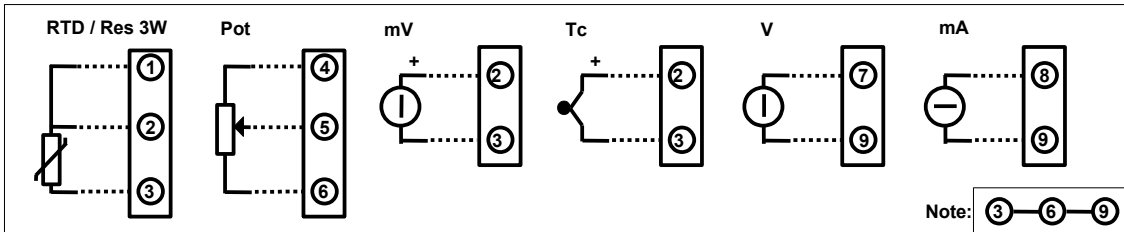


DIGITAL OUTPUTS

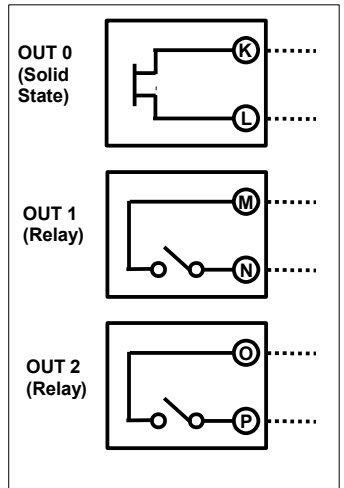


ANALOG INPUT 1 - V / mA

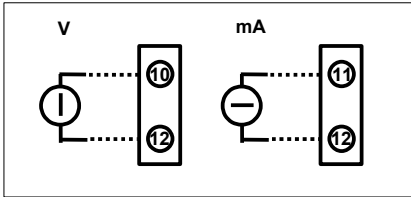


RS-485



POWER SUPPLY (*)




INIT




(*) Note: for UL installation the device must be powered using a power supply unit classified NEC class 2 or SELV

ANALOG OUTPUTS - mA

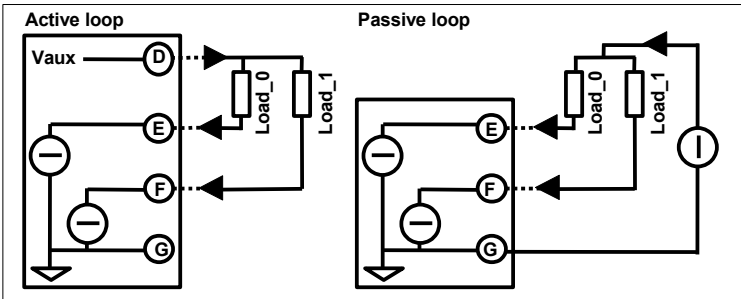

DIGITAL INPUTS



ISOLATIONS

1 UNIVERSAL ANALOG INPUT	RS485 LINE
1 V / mA INPUT	2 ANALOGUE OUTPUTS
3 DIGITAL INPUTS	SUPPLY
	1 SOLID STATE RELAY
	2 SPST RELAYS

INSTALLATION INSTRUCTIONS

The device is suitable for fitting to DIN rails in the vertical position.

For optimum operation and long life follow these instructions:

When the devices are installed side by side it may be necessary to separate them by at least 5 mm in the following case:

- If panel temperature exceeds 45°C and at least one of the overload conditions exist.

Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.


Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.

LIGHT SIGNALLING

LED	COLOR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered
		BLINK	Watch-dog Alarm
STS	YELLOW	OFF	Correct working
RX	RED	BLINK	Data receiving from RS-485
		OFF	No Data receiving
TX	RED	BLINK	Data Transmission on RS-485
		OFF	No Data Transmission
I(n)	RED	ON	Digital Input 'n': ON State
		OFF	Digital Input 'n': OFF State
R(n)	RED	ON	Digital Output 'n': ON State
		OFF	Digital Output 'n': OFF State

MECHANICAL DIMENSIONS (mm)

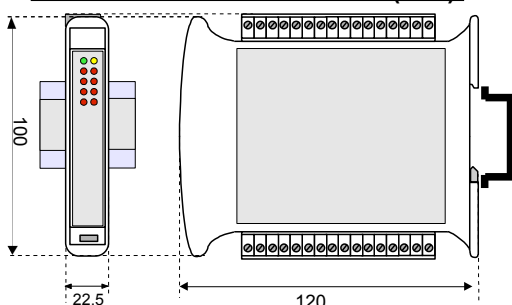

The symbol reported on the product indicates that the product itself must not be considered as a domestic waste. It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste. For more information contact the proper office in the user's city, the service for the waste treatment or the supplier from which the product has been purchased.

MODBUS REGISTERS MAPPING

Register	Description	Access
40001	--Reserved--	R/W
40002	Firmware Version	RO
40003		RO
40004	Name	R/W
40005		R/W
40006	--Reserved--	RO
40007	Address	R/W
40008	--Reserved--	RO
40009	Digital Input	RO
40010	Digital Output	R/W
40011	System Flags	R/W
40012	Enable PowerUp/Safe Dig. Out	R/W
40013	WatchDog Timer	R/W
40014+18	--Reserved--	RO
40019	Communication	R/W
40020+26	--Reserved--	RO
40027	Analog Input #1	RO
40028	Analog Input #2	RO
40029+32	--Reserved--	RO
40033	Analog Output #1	R/W
40034	Analog Output #2	R/W
41204	Reset Digital Counter	R/W
41205	Freq. Digital input #0	RO
41206	Freq. Digital input #1	RO
41207	Freq. Digital input #2	RO
41209+10	Counter Digital input #0 (32bit)	R/W
41211+12	Counter Digital input #1 (32bit)	R/W
41213+14	Counter Digital input #2 (32bit)	R/W
41217	Input Type	R/W
41221	PowerUp Analog Output #1	R/W
41222	PowerUp Analog Output #2	R/W
41223	Safe Analog Output #1	R/W
41224	Safe Analog Output #2	R/W

HOW TO ORDER

DAT3011 can be supplied with the configuration specified by the customer.

ORDER CODE:

DAT 3011 / **Pt100** / **20 mA**

Input type channel 1

Input type channel 2

■ = Requested
□ = Optional